



**EVENTS
& RENTAL**

MADE IN ITALY





ОСНОВНИМИ МАТЕРІАЛАМИ ДЛЯ ВИГОТОВЛЕННЯ ЕЛЕКТРОРОЗПОДІЛЬНИХ ШКАФІВ Є ТВЕРДИЙ БУТИЛОВИЙ КАУЧУК, ПОЛІЕТИЛЕН ТА ПОЛІКАРБОНАТ.

ТВЕРДА БУТИЛОВА ГУМА

Еластичність цього спеціального компаунду гарантує максимальну механічну стійкість до ударів, розтягування, розчавлювання та інтенсивного навантаження.

Коливання температури під час експлуатації в найрізноманітніших температурних діапазонах (-40 °C) не впливають на його основні характеристики.

У результаті отримано виріб із повною електричною ізоляцією, самогасним ефектом, максимальною стійкістю до масел, кислот, солей, бензину та широко використовуваних розчинників, а також винятковою стійкістю до старіння та ультрафіолетового випромінювання.

ПОЛІЕТИЛЕН

Цей новий матеріал має багато тих самих переваг, що й твердий бутилкаучук, зокрема чудову ударостійкість, механічну міцність та довговічність у широкому діапазоні температур. Однак його головна перевага — менша вага, що робить його ідеальним для мобільних застосувань та полегшує експлуатацію без шкоди для надійності чи безпеки.

ПОЛІКАРБОНАТ

Для вікон було обрано прозорий полікарбонат, оскільки він практично не розбивається та забезпечує максимальний захист пристроїв безпеки.

INDEX

SERIES CAGE 1250A - 800A - 400A - 250A	64
SERIES PB FLIGHT CASE 630A - 400A - 250A - 125A - 63A - 32A	76
POLYETHYLENE POWER BOXES 125A - 63A - 32A	84
HARD BUTYL RUBBER POWER BOXES 125A - 63A - 32A - 16A	91
MOBILE MULTIPLIERS	104
MOBILE CABLE EXTENSIONS	107
ELECTRIC CABLES & CABLE CROSSOVERS	110
POWER LOCK CONNECTORS	113
PLUGS & SOCKETS CEE - SOCAPEX - POWERCON TRUE	115
INFORMATION	118

ICONS



SOCAPEX onboard



POWERCON TRUE TOP on board

SERIES CAGE



→ Мобільний блок живлення, з нержавіючої сталі корпус, сконструйован та зібрана таким чином, щоб витримувати інтенсивну експлуатацію.

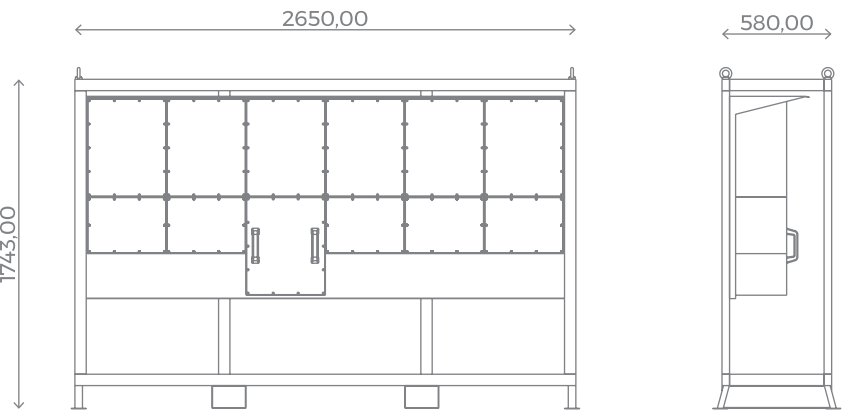
- Листовий дах у верхній частині корпусу для захисту від дощу та атмосферних впливів.
- Обладнання всередині для захисту від випадкового удару.

↳ чотири гайки з вушком по кутах для підйому конструкція та дві напрямні для доступу навантажувача та підйому.

- Ступінь захисту IP54.
- Клас ізоляції II.

SERIES CAGE 400V 1250A

DIMENSIONS: **W** 2650, **H** 1743, **D** 580 MM



ARTICLE CODE AR6866K100100AIMPVWX

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT																																																
			Main Switch	Outlets																																																	
  <table><tr><td>PE</td><td>N</td><td>L1</td><td>L2</td><td>L3</td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td>PE</td><td>N</td><td>L1</td><td>L2</td><td>L3</td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td>PE</td><td>N</td><td>L1</td><td>L2</td><td>L3</td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td>PE</td><td>N</td><td>L1</td><td>L2</td><td>L3</td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td>PE</td><td>N</td><td>L1</td><td>L2</td><td>L3</td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr></table>	PE	N	L1	L2	L3						PE	N	L1	L2	L3						PE	N	L1	L2	L3						PE	N	L1	L2	L3						PE	N	L1	L2	L3						15x PG 48 cable gland.	25x Female Power Lock panel connectors 400V 400A IP67 (L1-L2-L3-N-PE). 1x CEE 400V 32A 3P+N+E 6h IP67 black panel socket. 1x CEE 230V 16A 2P+E 6h IP67 black panel socket.	1x MCCB 4P 1250A C-50kA with rotary maneuver.
PE	N	L1	L2	L3																																																	
																																																					
PE	N	L1	L2	L3																																																	
																																																					
PE	N	L1	L2	L3																																																	
																																																					
PE	N	L1	L2	L3																																																	
																																																					
PE	N	L1	L2	L3																																																	
																																																					



- Mobile power box with structure entirely in stainless steel, designed and assembled to withstand heavy-duty use.

→ Sheet metal roof on the upper side of the structure to protect against rain and atmospheric agents.

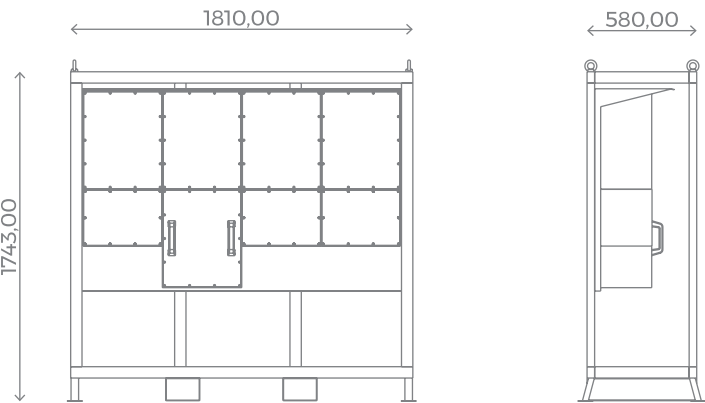
→ Equipment inside the structure to protect against accidental impact.
- Four eyebolts for lifting at the corners of the structure and two guides for forklift access and lifting.

→ IP54 protection rating.

→ Class of insulation II.

SERIES CAGE 400V 800A

DIMENSIONS: **W** 1810, **H** 1743, **D** 580 MM



ARTICLE CODE AR4443K100100AIMPVWX

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	10x PG 48 cable gland.	15x Female Power Lock panel connectors 400V 400A IP67 (L1-L2-L3-N-PE).	1x MCCB 4P 800A C-50kA with rotary maneuver.	3x MCCB 4P 400A C-36kA with earth-leakage relay (adjustable fault current and delay time) and rotary maneuver.	1x External emergency button with 10 meters of cable.
		1x CEE 400V 32A 3P+N+E 6h IP67 black panel socket.		1x RCBO 4P 32A C-6kA I _{dn} =30mA type AC.	1x Emergency button on control panel.
		1x CEE 230V 16A 2P+E 6h IP67 black panel socket.		1x RCBO 1P+N 16A C-4.5kA I _{dn} =30mA type AC.	3x Digital multimeters.
					3x Red LEDs indicating power network presence.
					13x Green LEDs indicating network distribution presence.
					* Equipment protected by fuse switch disconnectors.



- Stackable mobile power box with structure entirely in stainless steel, designed and assembled to withstand heavy-duty use.

→ Sheet metal roof on the upper side of the structure to protect against rain and atmospheric agents.

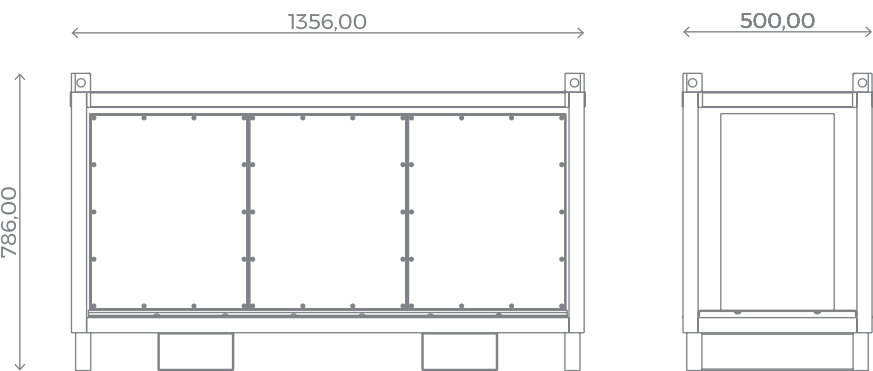
→ Equipment inside the structure to protect against accidental impact.
- Four eyebolts for lifting at the corners of the structure and two guides for forklift access and lifting.

→ IP54 protection rating.

→ Class of insulation II.

SERIES CAGE 400V 400A

DIMENSIONS: **W** 1356, **H** 786, **D** 500 MM



ARTICLE CODE GB3221K300631AMWXC

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	5x Male Power Lock panel connectors 400V 400A IP67 (L1-L2-L3-N-PE).	5x Female Power Lock panel connectors 400V 400A IP67 (L1-L2-L3-N-PE; Power Line Continuation).	1x MCCB 4P 400A C-36kA with rotary maneuver.	1x MCB 4P 125A C-10kA with earth-leakage relay (adjustable fault current and delay time).	1x External emergency button with 10 meters of cable.
		1x CEE 400V 125A 3P+N+E 6h IP67 black panel socket.		3x MCB 4P 63A C-10kA with earth-leakage relay (adjustable fault current and delay time).	1x Emergency button on control panel.
		3x CEE 400V 63A 3P+N+E 6h IP67 black panel sockets.		6x RCBO 4P 32A C-6kA I _{dn} =30mA type AC.	3x Red LEDs indicating power network presence.
		6x CEE 400V 32A 3P+N+E 6h IP67 black panel sockets.		3x RCBO 1P+N 16A C-4.5kA I _{dn} =30mA type AC.	36x Green LEDs indicating network distribution presence.
		3x CEE 230V 16A 2P+E 6h IP67 black panel sockets.			* Equipment protected by fuse switch disconnectors.



- Stackable mobile power box with structure entirely in stainless steel, designed and assembled to withstand heavy-duty use.

→ Sheet metal roof on the upper side of the structure to protect against rain and atmospheric agents.

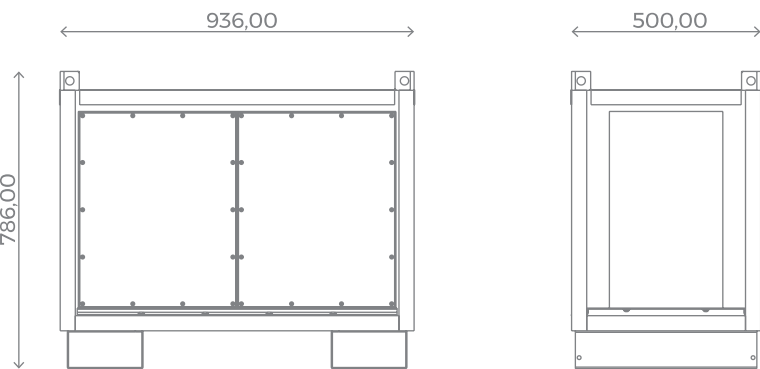
→ Equipment inside the structure to protect against accidental impact.
- Four eyebolts for lifting at the corners of the structure and two guides for forklift access and lifting.

→ IP54 protection rating.

→ Class of insulation II.

SERIES CAGE 400V 400A

DIMENSIONS: **W** 936, **H** 786, **D** 500 MM



ARTICLE CODE GB2221K000000CEPVWX

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
PE N L1 L2 L3	10x Male Power Lock panel connectors 400V 400A IP67 (L1-L2-L3-N-PE). Power supply regulated by three-position switching device (OFF - IN 1 - IN 2).	10x Female Power Lock panel connectors 400V 400A IP67 (L1-L2-L3-N-PE; Power Line Continuation).	1x MCCB 4P 400A C-36kA with earth-leakage relay (adjustable fault current and delay time) and rotary maneuver.		1x External emergency button with 10 meters of cable. 6x Red LEDs indicating power network presence. 6x Green LEDs indicating network distribution presence. * Equipment protected by fuse switch disconnectors.



→ Мобільний блок живлення, що можна штабелювати виготовлений із нержавіючої сталі, розроблений і зібраний таким чином, щоб витримувати інтенсивну експлуатацію.

⚡ Листовий дах у верхній частині споруди для захисту від дощу та атмосферних впливів.

⚡ Обладнання всередині споруди для захисту від випадкового удару.

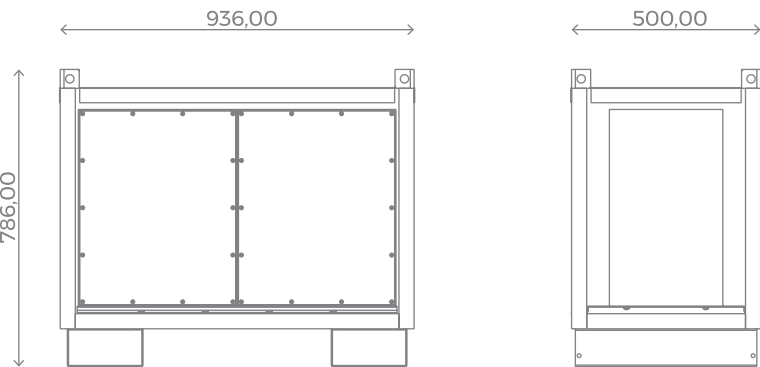
⚡ Чотири проушини для підйому по кутах конструкція та дві направляючі для доступу вилкового навантажувача та підйому.

• Ступінь захисту IP54. •

Клас ізоляції II.

SERIES CAGE 400V 250A

DIMENSIONS: **W** 936, **H** 786, **D** 500 MM



ARTICLE CODE GB2221K300621AMPVXC

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	5x Male Power Lock panel connectors 400V 400A IP67 (L1-L2-L3-N-PE).	1x CEE 400V 125A 3P+N+E 6h IP67 black panel socket.	1x MCCB 4P 250A C-36kA with rotary maneuver.	1x MCB 4P 125A C-10kA with earth-leakage relay (adjustable fault current and delay time).	1x External emergency button with 10 meters of cable.
		2x CEE 400V 63A 3P+N+E 6h IP67 black panel sockets.		2x MCB 4P 63A C-10kA with earth-leakage relay (adjustable fault current and delay time).	1x Emergency button on control panel.
		6x CEE 400V 32A 3P+N+E 6h IP67 black panel sockets.			1x Digital multimeter.
		3x CEE 230V 16A 2P+E 6h IP67 black panel sockets.		6x RCBO 4P 32A C-6kA I _{dn} =30mA type AC.	3x Red LEDs indicating power network presence.
				3x RCBO 1P+N 16A C-4.5kA I _{dn} =30mA type AC.	30x Green LEDs indicating network distribution presence.
					* Equipment protected by fuse switch disconnectors.

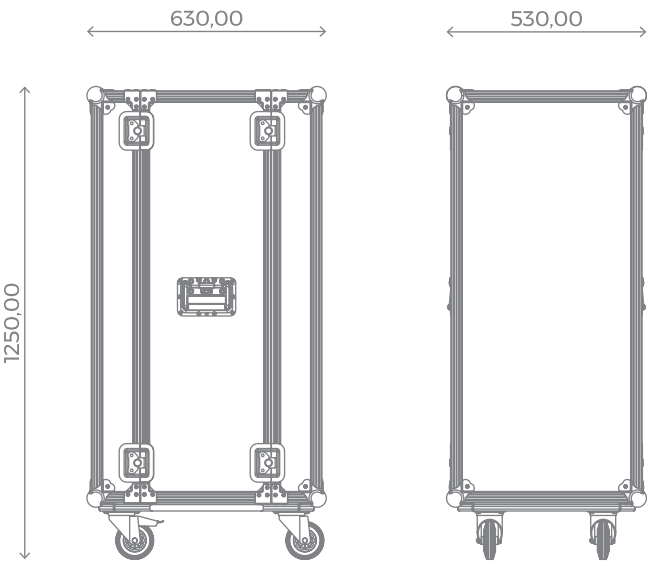


SERIES PB



SERIES PB 24U

- Переносний розподільний щит, розміщений у 19-дюймовій стійці, у флайт-кейсі, 24 блоки.
- Знімні кришки (передня та задня).
- Колісна рама з поворотними колесами.
- Внутрішній корпус із самозатухаючого ізоляційного ПВХ, стійкого до атмосферних та хіміко-фізичних впливів. • Ступінь захисту IP54.
- Клас ізоляції I.



SERIES PB 24U 400V 630A

DIMENSIONS: **W** 630, **H** 1250, **D** 530 MM


ARTICLE CODE P24U349K300362AMPVWX

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	5x Male Power Lock panel connectors 400V 750A IP67 (L1-L2-L3-N-PE).	5x Female Power Lock panel connectors 400V 750A IP67 (L1-L2-L3-N-PE; Power Line Continuation). 2x CEE 400V 125A 3P+N+E 6h IP67 black panel sockets. 6x CEE 400V 63A 3P+N+E 6h IP67 black panel sockets. 3x CEE 400V 32A 3P+N+E 6h IP67 black panel sockets. 3x CEE 230V 16A 2P+E 6h IP67 black panel sockets.	1x MCCB 4P 630A C-36kA with rotary maneuver.	1x Switch 4P 630A with rotary maneuver. 2x RCBO 4P 125A C-10kA Idn=30mA type AC. 6x RCBO 4P 63A C-10kA Idn=30mA type AC. 3x RCBO 4P 32A C-6kA Idn=30mA type AC. 3x RCBO 1P+N 16A C-6kA Idn=30mA type AC.	1x External emergency button with 10 meters of cable. 1x Digital multimeter. 3x Red LEDs indicating power network presence. 39x Green LEDs indicating network distribution presence. * Equipment protected by fuse switch disconnectors.

SERIES PB 24U 400V 400A

DIMENSIONS: **W** 630, **H** 1250, **D** 530 MM

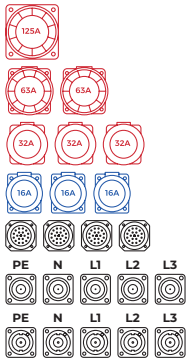
ARTICLE CODE P24U221K300332AMPVWX

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	5x Male Power Lock panel connectors 400V 400A IP67 (L1-L2-L3-N-PE).	5x Female Power Lock panel connectors 400V 400A IP67 (L1-L2-L3-N-PE; Power Line Continuation).	1x MCCB 4P 400A C-36kA with rotary maneuver.	1x Switch 4P 400A with rotary maneuver.	1x External emergency button with 10 meters of cable. 1x Digital multimeter.
		2x CEE 400V 125A 3P+N+E 6h IP67 black panel sockets.		2x RCBO 4P 125A C-10kA I _{dn} =30mA type AC.	
		3x CEE 400V 63A 3P+N+E 6h IP67 black panel sockets.		3x RCBO 4P 63A C-10kA I _{dn} =30mA type AC.	3x Red LEDs indicating power network presence.
		3x CEE 400V 32A 3P+N+E 6h IP67 black panel sockets.		3x RCBO 4P 32A C-6kA I _{dn} =30mA type AC.	30x Green LEDs indicating network distribution presence.
		3x CEE 230V 16A 2P+E 6h IP67 black panel sockets.		3x RCBO 1P+N 16A C-6kA I _{dn} =30mA type AC.	* Equipment protected by fuse switch disconnectors.

SERIES PB 24U 400V 400A

DIMENSIONS: **W** 630, **H** 1250, **D** 530 MM

ARTICLE CODE P24U221K300321AMPVWX

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	5x Male Power Lock panel connectors 400V 400A IP67 (L1-L2-L3-N-PE).	5x Female Power Lock panel connectors 400V 400A IP67 (L1-L2-L3-N-PE; Power Line Continuation).	1x MCCB 4P 400A C-36kA with rotary maneuver.	1x Switch 4P 400A with rotary maneuver.	1x External emergency button with 10 meters of cable. 1x Digital multimeter.
		1x CEE 400V 125A 3P+N+E 6h IP67 black panel socket.		1x RCBO 4P 125A C-10kA I _{dn} =30mA type AC.	
		2x CEE 400V 63A 3P+N+E 6h IP67 black panel sockets.		2x RCBO 4P 63A C-10kA I _{dn} =30mA type AC.	3x Red LEDs indicating power network presence.
		3x CEE 400V 32A 3P+N+E 6h IP67 black panel sockets.		3x RCBO 4P 32A C-6kA I _{dn} =30mA type AC.	48x Green LEDs indicating network distribution presence.
		3x CEE 230V 16A 2P+E 6h IP67 black panel sockets.		27x RCBO 1P+N 16A C-6kA I _{dn} =30mA type AC.	* Equipment protected by fuse switch disconnectors.
		4x Female panel connectors 230V 16A 19P IP67 Socapex compatible.			

SERIES PB 21U

→ Мобільний розподільний щит, розміщений у 19-дюймовій стійці

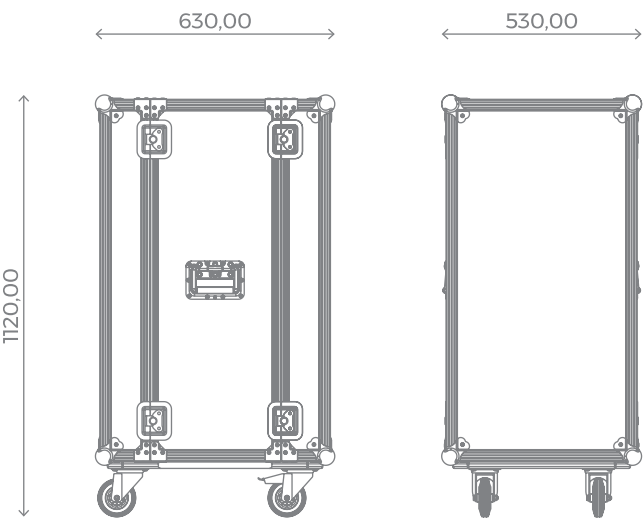
FLIGHT CASE, 21 блок.

- Знімні кришки (передня та задня).
- Колісна рама з поворотними колесами.
- Внутрішній корпус із самозатухаючого ізоляційного ПВХ,

стійкий до впливу атмосферних та хіміко-фізичних факторів.

- Ступінь захисту IP54. •


Клас ізоляції I.



SERIES PB 21U 400V 250A

DIMENSIONS: **W** 630, **H** 1120, **D** 530 MM

ARTICLE CODE P21U139K300320ALMPVWX

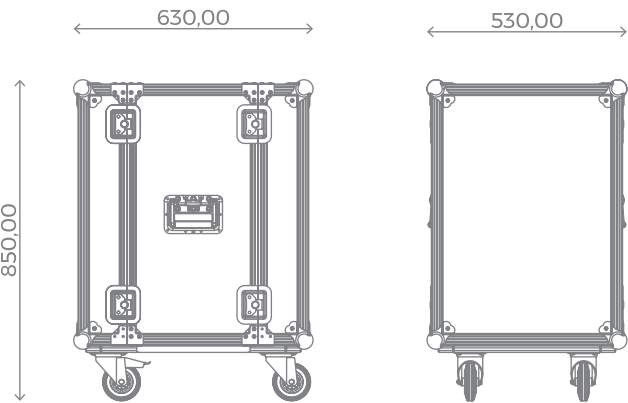
LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	5x Male Power Lock panel connectors 400V 400A IP67 (L1-L2-L3-N-PE).	2x CEE 400V 63A 3P+N+E 6h IP67 black panel sockets.	1x MCCB 4P 250A C-36kA with rotary maneuver.	2x RCBO 4P 63A C-10kA I _{dn} =30mA type AC.	1x External emergency button with 10 meters of cable.
		3x CEE 400V 32A 3P+N+E 6h IP67 black panel sockets.		3x RCBO 4P 32A C-6kA I _{dn} =30mA type AC.	1x Digital multimeter.
		3x CEE 230V 16A 2P+E 6h IP67 black panel sockets.		21x RCBO 1P+N 16A C-6kA I _{dn} =30mA type AC.	3x Red LEDs indicating power network presence.
		3x Female panel connectors 230V 16A 19P IP67 Socapex compatible.			36x Green LEDs indicating network distribution presence. * Equipment protected by fuse switch disconnectors.

SERIES PB 15U

- Переносний розподільний щит, розміщений у 19-дюймовій стійці,
- у футлярі для перевезення, 15 одиниць.
- Знімні кришки (передня та задня).
- Колісна рама з поворотними колесами.
- Внутрішній корпус із самозатухаючого ізоляційного ПВХ,

стійкий до впливу атмосферних та хіміко-фізичних факторів.


- Ступінь захисту IP54.
- Клас ізоляції I.



SERIES PB 15U 400V 250A

DIMENSIONS: **W** 630, **H** 850, **D** 530 MM


ARTICLE CODE P15U139K300321AMPVX

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	5x Male Power Lock panel connectors 400V 400A (L1-L2-L3-N-PE).	1x CEE 400V 125A 3P+N+E 6h IP67 black panel socket.	1x MCCB 4P 250A C-36kA with rotary maneuver.	1x RCBO 4P 125A C-10kA I _{dn} =30mA type AC.	1x External emergency button with 10 meters of cable.
		2x CEE 400V 63A 3P+N+E 6h IP67 black panel sockets.		2x RCBO 4P 63A C-10kA I _{dn} =30mA type AC.	1x Digital multimeter.
		3x CEE 400V 32A 3P+N+E 6h IP67 black panel sockets.		3x RCBO 4P 32A C-6kA I _{dn} =30mA type AC.	3x Red LEDs indicating power network presence.
		3x CEE 230V 16A 2P+E 6h IP67 black panel sockets.		3x RCBO 1P+N 16A C-6kA I _{dn} =30mA type AC.	21x Green LEDs indicating network distribution presence.
		* Equipment protected by fuse switch disconnectors.			

SERIES PB 15U 400V 125A

DIMENSIONS: **W** 630, **H** 850, **D** 530 MM


ARTICLE CODE 15U70K60320CMPV-CH

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 125A 3P+N+E 6h IP67 black panel plug.	2x CEE 400V 63A 3P+N+E 6h IP67 black panel sockets.	1x MCB 4P 125A C-10kA.	2x RCBO 4P 63A C-10kA I _{dn} =30mA type AC.	1x External emergency button with 10 meters of cable.
		3x CEE 400V 32A 3P+N+E 6h IP67 black panel sockets.		3x RCBO 4P 32A C-6kA I _{dn} =30mA type AC.	1x Digital multimeter.
		6x CEE 230V 16A 2P+E 6h IP67 black panel sockets.		6x RCBO 1P+N 16A C-4,5kA I _{dn} =30mA type AC.	3x Red LEDs indicating power network presence. 21x Green LEDs indicating network distribution presence. * Equipment protected by fuse switch disconnectors.

SERIES PB 15U 400V 125A

DIMENSIONS: **W** 630, **H** 850, **D** 530 MM

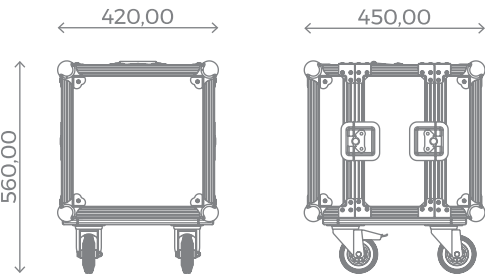
ARTICLE CODE P15U70K300210ALMPV

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
	Descrizione	Descrizione	Main Switch	Outlets	
	1x CEE 400V 125A 3P+N+E 6h IP67 black panel plug.	1x CEE 400V 63A 3P+N+E 6h IP67 black panel socket.	1x MCB 4P 125A C-10kA.	1x RCBO 4P 63A C-10kA I _{dn} =30mA type AC.	1x External emergency button with 10 meters of cable.
		2x CEE 400V 32A 3P+N+E 6h IP67 black panel sockets.		2x RCBO 4P 32A C-6kA I _{dn} =30mA type AC.	1x Digital multimeter.
		3x CEE 230V 16A 2P+E 6h IP67 black panel sockets.		21x RCBO 1P+N 16A C-6kA I _{dn} =30mA type AC.	3x Red LEDs indicating power network presence.
		3x Female panel connectors 230V 16A 19P IP67 Socapex compatible.			30x Green LEDs indicating network distribution presence. * Equipment protected by fuse switch disconnectors.

SERIES PB 270

- Переносний розподільний щит у флайт-кейсі, СЕРІЯ 270.
- Знімні кришки (передня та задня).
 - Колісна рама з поворотними колесами.
 - Внутрішній корпус із самозатухаючої ізоляції твердий бутилкаучук, стійкий до впливу атмосферних та фізико-хімічних факторів.

→ Ступінь захисту IP54. Клас ізоляції II.



SERIES PB 270 400V 63A

DIMENSIONS: **W** 420, **H** 560, **D** 450 MM

ARTICLE CODE PB35K600200BV

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 63A 3P+N+E 6h IP67 black panel plug.	2x CEE 400V 32A 3P+N+E 6h IP67 black panel sockets. 6x CEE 230V 16A 2P+E 6h IP67 black panel sockets.	1x RCCB 4P 63A Idn=30mA type AC.	2x MCB 4P 32A C-6kA. 6x MCB 1P+N 16A C-6kA.	3x Red LEDs indicating power network presence. 12x Green LEDs indicating network distribution presence. * Equipment protected by fuse switch disconnectors.

SERIES PB 270 400V 32A

DIMENSIONS: **W** 420, **H** 560, **D** 450 MM

ARTICLE CODE PB17K900000AV

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 32A 3P+N+E 6h IP67 black panel plug.	9x CEE 230V 16A 2P+E 6h IP67 black panel sockets.	1x MCB 4P 32A C-6kA.	9x RCBO 1P+N 16A C-6kA Idn=30mA type AC.	3x Red LEDs indicating power network presence. 9x Green LEDs indicating network distribution presence. * Equipment protected by fuse switch disconnectors.

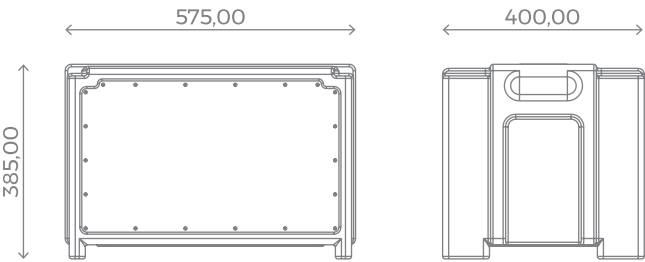
POLYETHYLENE ELECTRICAL POWER BOXES



SERIES 810

Набірний поліетиленовий корпус у комплекті з дві бічні ручки для перенесення та надійні опори.

Клас ізоляції II.



SERIES 810 400V 125A

DIMENSIONS: **W** 575, **H** 385, **D** 400 MM

IP54 protection rating.

ARTICLE CODE 81070K200600AV

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 125A 3P+N+E 6h IP67 black panel plug.	6x CEE 400V 32A 3P+N+E 6h IP67 black panel sockets. 2x CEE 230V 16A 2P+E 6h IP67 black panel sockets.	1x MCB 4P 125A C-10kA.	6x RCBO 4P 32A C-6kA Idn=30mA type AC. 2x RCBO 1P+N 16A C-6kA Idn=30mA type AC.	3x Red LEDs indicating power network presence. 20x Green LEDs indicating network distribution presence. * Equipment protected by fuse switch disconnectors.

SERIES 810 400V 63A

DIMENSIONS: **W** 575, **H** 385, **D** 400 MM

IP44 protection rating.

ARTICLE CODE 81035K620000CV


LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 63A 3P+N+E 6h IP67 black panel plug.	2x CEE 400V 32A 3P+N+E 6h IP44 black panel sockets. 6x CEE 230V 16A 2P+E 6h IP44 black panel sockets.	1x RCBO 4P 63A C-10kA Idn=30mA type AC.	2x MCB 4P 32A C-6kA. 6x MCB 1P+N 16A C-4.5kA.	3x Red LEDs indicating power network presence. 12x Green LEDs indicating network distribution presence. * Equipment protected by fuse switch disconnectors.

SERIES 810 400V 63A

DIMENSIONS: **W** 575, **H** 385, **D** 400 MM

IP54 protection rating.

ARTICLE CODE 81035K900200AV


LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 63A 3P+N+E 6h IP67 black panel plug.	2x CEE 400V 32A 3P+N+E 6h IP67 black panel sockets.	1x MCB 4P 63A C-10kA.	2x RCBO 4P 32A C-6kA I _{dn} =30mA type AC.	3x Red LEDs indicating power network presence.
		9x CEE 230V 16A 2P+E 6h IP67 black panel sockets.		9x RCBO 1P+N 16A C-6kA I _{dn} =30mA type AC.	15x Green LEDs indicating network distribution presence.
					* Equipment protected by fuse switch disconnectors.

SERIES 810 400V 63A

DIMENSIONS: **W** 575, **H** 385, **D** 400 MM

IP54 protection rating.

ARTICLE CODE 81035KC00000AV


LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 63A 3P+N+E 6h IP67 black panel plug.	12x CEE 230V 16A 2P+E 6h IP67 black panel sockets.	1x MCB 4P 63A C-10kA.	12x RCBO 1P+N 16A C-6kA I _{dn} =30mA type AC.	3x Red LEDs indicating power network presence.
					12x Green LEDs indicating network distribution presence.
					* Equipment protected by fuse switch disconnectors.

SERIES 810 400V 63A

DIMENSIONS: **W** 575, **H** 385, **D** 400 MM

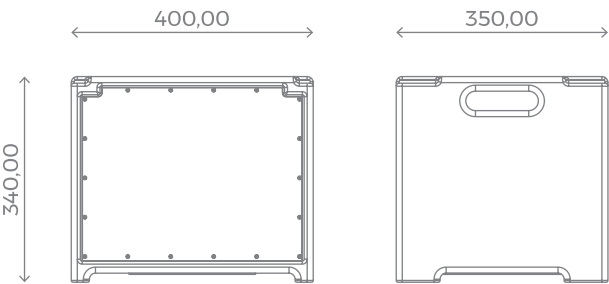
IP54 protection rating.

ARTICLE CODE 81035K100100ALV

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 63A 3P+N+E 6h IP67 black panel plug.	1x CEE 400V 32A 3P+N+E 6h IP67 black panel socket.	1x MCB 4P 63A C-10kA.	1x RCBO 4P 32A C-6kA I _{dn} =30mA type AC.	3x Red LEDs indicating power network presence.
		1x CEE 230V 16A 2P+E 6h IP67 black panel socket.			28x Green LEDs indicating network distribution presence.
		4x Female panel connectors 230V 16A 19P IP67 Socapex compatible.		25x RCBO 1P+N 16A C-6kA I _{dn} =30mA type AC.	* Equipment protected by fuse switch disconnectors.

SERIES 809

- Поліетиленовий корпус, який можна штабелювати, оснащений двома бічними ручками для транспортування та посиленими опорними ніжками.
- Ступінь захисту IP44.
 - Клас ізоляції II.



SERIES 809 400V 125A

DIMENSIONS: **W** 400, **H** 340, **D** 350 MM

IP54 protection rating.

ARTICLE CODE 80970K000020AV

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 125A 3P+N+E 6h IP67 black panel plug.	2x CEE 400V 63A 3P+N+E 6h IP67 black panel sockets.	1x MCB 4P 125A C-10kA.	2x RCBO 4P 63A C-10kA I _{dn} =30mA type AC.	3x Red LEDs indicating power network presence. 6x Green LEDs indicating network distribution presence. * Equipment protected by fuse switch disconnectors.

SERIES 809 400V 32A

DIMENSIONS: **W** 400, **H** 340, **D** 350 MM

IP44 protection rating.

ARTICLE CODE 80917K900000BV


LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 32A 3P+N+E 6h IP44 black panel plug.	9x CEE 230V 16A 2P+E 6h IP44 black panel sockets.	1x RCCB 4P 40A I _{dn} =30mA type AC.	9x MCB 1P+N 16A C-4.5kA.	3x Red LEDs indicating power network presence. 9x Green LEDs indicating network distribution presence. * Equipment protected by fuse switch disconnectors.

SERIES 809 400V 32A

DIMENSIONS: **W** 400, **H** 340, **D** 350 MM

IP44 protection rating.

ARTICLE CODE 80917K600000BKV


LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 32A 3P+N+E 6h IP67 black panel plug.	6x CEE 230V 16A 2P+E 6h IP44 black panel sockets.	1x RCCB 4P 40A Idn=30mA type AC.	6x MCB 1P+N 16A C-4.5kA.	3x Red LEDs indicating power network presence.
		6x POWERCON TRUE TOP female panel connectors 230V 16A 3P IP67.			12x Green LEDs indicating network distribution presence.
					* Equipment protected by fuse switch disconnectors.

SERIES 809 400V 32A

DIMENSIONS: **W** 400, **H** 340, **D** 350 MM

IP54 protection rating.

ARTICLE CODE 80917K000000MVZ4


LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 32A 3P+N+E 6h IP67 black panel plug.	4x Female panel connectors 230V 16A 19P IP67 Socapex compatible.	1x MCB 4P 32A C-6kA.	24x RCBO 1P+N 16A C-4.5kA Idn=30mA type AC.	3x Red LEDs indicating power network presence.
					24x Green LEDs indicating network distribution presence.
					* Equipment protected by fuse switch disconnectors.

SERIES 809 400V 32A

DIMENSIONS: **W** 400, **H** 340, **D** 350 MM

IP54 protection rating.

ARTICLE CODE 80917K600100AVW

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 32A 3P+N+E 6h IP67 black panel plug.	1x CEE 400V 32A 3P+N+E 6h IP67 black panel socket (Power Line Continuation). 6x CEE 230V 16A 2P+E 6h IP67 black panel sockets.	1x MCB 4P 32A C-6kA.	6x RCBO 1P+N 16A C-6kA I _{dn} =30mA type AC.	3x Red LEDs indicating power network presence. 9x Green LEDs indicating network distribution presence. * Equipment protected by fuse switch disconnectors.

SERIES 809 400V 32A

DIMENSIONS: **W** 400, **H** 340, **D** 350 MM

IP54 protection rating.

ARTICLE CODE 80917K000000ALV

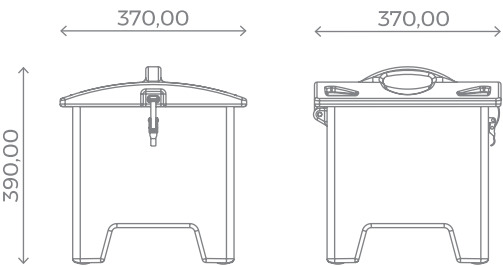
LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 32A 3P+N+E 6h IP67 black panel plug.	1x Female panel connector 230V 16A 19P IP67 Socapex compatible. 6x POWERCON TRUE TOP female panel connectors 230V 16A 3P IP67.	1x MCB 4P 32A C-6kA.	12x RCBO 1P+N 16A C-6kA I _{dn} =30mA type AC.	3x Red LEDs indicating power network presence. 12x Green LEDs indicating network distribution presence. * Equipment protected by fuse switch disconnectors.

SERIES 490

→ Поліетиленовий корпус, що можна штабелювати та розміщувати один на інший, з ручкою для перенесення та посиленими опорними ніжками.

⚡ Автоматичні вимикачі, розташовані під кришкою, замок із важелем із нержавіючої сталі.

- Ступінь захисту IP54.
- Клас ізоляції II.



SERIES 490 400V 63A

DIMENSIONS: **W** 370, **H** 390, **D** 370 MM

ARTICLE CODE 49035KC00100AEWC

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
                                                    	1x CEE 400V 63A 3P+N+E 6h IP67 black panel plug.	1x CEE 400V 63A 3P+N+E 6h IP67 black panel socket (Power Line Continuation). 1x CEE 400V 32A 3P+N+E 6h IP67 black panel socket. 12x CEE 230V 16A 2P+E 6h IP67 black panel sockets.	1x MCB 4P 63A C-10kA.	1x RCBO 4P 32A C-10kA I _{dn} =30mA type AC. 12x RCBO 1P+N 16A C-6kA I _{dn} =30mA type AC.	

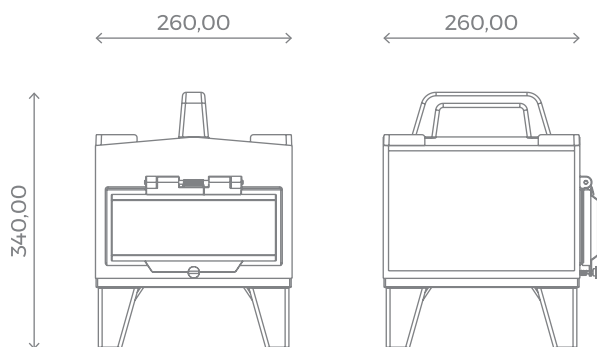
HARD BUTYL RUBBER POWER BOXES



SERIES 470

→ Самозатухающий корпус из твердого бутылкаучуку з ручкою для перенесення.

- Прозоре вікно з полікарбонату для захисту перемикачів.
- Ступінь захисту IP54.
- Клас ізоляції II.



SERIES 470 400V 125A

DIMENSIONS: **W** 260, **H** 340, **D** 260 MM

ARTICLE CODE 47070KWCN-CH

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 125A 3P+N+E 6h IP67 black panel plug.	2x CEE 400V 63A 3P+N+E 6h IP67 black panel sockets.	1x Non-automatic switch 4P 125A.	2x MCB 4P 63A C-10kA.	

SERIES 470 400V 63A

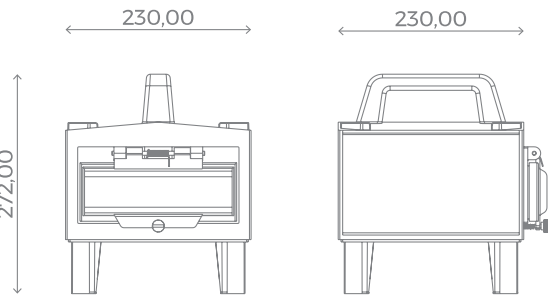
DIMENSIONS: **W** 260, **H** 340, **D** 260 MM

ARTICLE CODE 47035KW2CN-CH

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 63A 3P+N+E 6h IP67 black panel plug.	2x CEE 400V 32A 3P+N+E 6h IP67 black panel sockets.	1x RCCB 4P 63A Idn=30mA type AC.	2x MCB 4P 32A C-6kA.	

SERIES 460

- Самозатухающий корпус из твердого бутилкаучука з ручкою для перенесення.
- Прозоре вікно з полікарбонату для захисту перемикачів.
- Клас ізоляції II.



SERIES 460 400V 32A

DIMENSIONS: **W** 230, **H** 272, **D** 230 MM

IP44 protection rating.

ARTICLE CODE 46017KW600000B

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 32A 3P+N+E 6h IP44 black panel plug.	6x CEE 230V 16A 2P+E 6h IP44 black panel sockets.	1x RCCB 4P 40A Idn=30mA type AC.	3x MCB 1P+N 16A C-4.5kA (One MCB per every two sockets).	

SERIES 460 400V 32A

DIMENSIONS: **W** 230, **H** 272, **D** 230 MM

IP54 protection rating.

ARTICLE CODE 46017K030000A


LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 32A 3P+N+E 6h IP67 black panel plug.	3x CEE 230V 32A 2P+E 6h IP67 black panel sockets.	1x MCB 4P 32A C-6kA.	3x RCBO 1P+N 32A C-4.5kA Idn=30mA type AC.	

SERIES 460 230V 16A

DIMENSIONS: **W** 230, **H** 272, **D** 230 MM

IP54 protection rating.

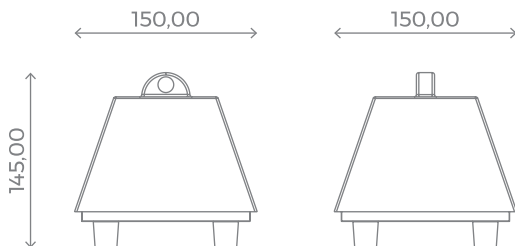
ARTICLE CODE 4603K400000C3

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 230V 16A 2P+E 6h IP67 black flying plug with 3 meters of 3G 2.5 sqmm neoprene H07RN-F electric cable.	4x CEE 230V 16A 2P+E 6h IP67 black panel sockets.	1x RCCB 1P+N 25A I _{dn} =30mA type AC.	4x MCB 1P+N 16A C-4.5kA.	

SERIES 420

→ Самозатухающий корпус из твердого бутылкаучуку з ручкою для перенесення.

- Ступінь захисту IP54.
- Клас ізоляції II.



SERIES 420 400V 32A

DIMENSIONS: **W** 150, **H** 145, **D** 150 MM

ARTICLE CODE 42017KWC1N

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 32A 3P+N+E 6h IP67 black panel plug.	2x CEE 400V 32A 3P+N+E 6h IP67 black panel sockets.		3x Thermal switches 30A.	

SERIES 420 SOCAPEX

DIMENSIONS: **W** 150, **H** 145, **D** 150 MM

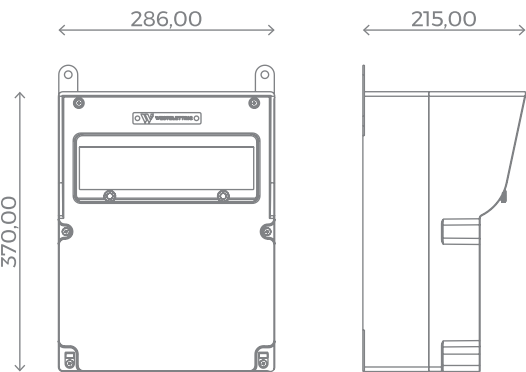
Socapex multiplier in self-extinguishing hard butyl rubber with carrying handle.

ARTICLE CODE 42026C

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x Male panel connector 230V 16A 19P IP67 Socapex compatible.	2x Female panel connectors 230V 16A 19P IP67 Socapex compatible.			

SERIES 250


- Самозатухающий корпус из твердого бутылкаучуку з ручкою для перенесення.
- Прозоре вікно з полікарбонату для захисту перемикачів.
 - Ступінь захисту IP54.
 - Клас ізоляції II.



SERIES 250 400V 32A

DIMENSIONS: **W** 286, **H** 370, **D** 215 MM

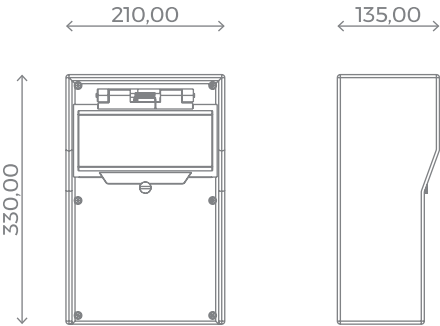
ARTICLE CODE 25017K600000B2

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 32A 3P+N+E 6h IP67 black flying plug with 2 meters of 5G 6 sqmm neoprene H07RN-F electric cable.	6x CEE 230V 16A 2P+E 6h IP67 black panel sockets.	1x RCCB 4P 40A I _{dn} =30mA type AC.	6x MCB 1P+N 16A C-4.5kA.	

SERIES 210

→ Самозатухающий корпус из твердого бутылкачуку з ручкою для перенесення.

- Прозоре вікно з полікарбонату для захисту перемикачів.
- Ступінь захисту IP54.
- Клас ізоляції II.



SERIES 210 400V 32A

DIMENSIONS: **W** 210, **H** 330, **D** 135 MM

ARTICLE CODE 21017K600000B2

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 32A 3P+N+E 6h IP44 black flying plug with 2 meters of 5G 6 sqmm neoprene H07RN-F electric cable.	6x CEE 230V 16A 2P+E 6h IP44 black panel sockets.	1x RCCB 4P 40A Idn=30mA type AC.	6x MCB 1P+N 16A C-4.5kA.	

SERIES 210 400V 32A

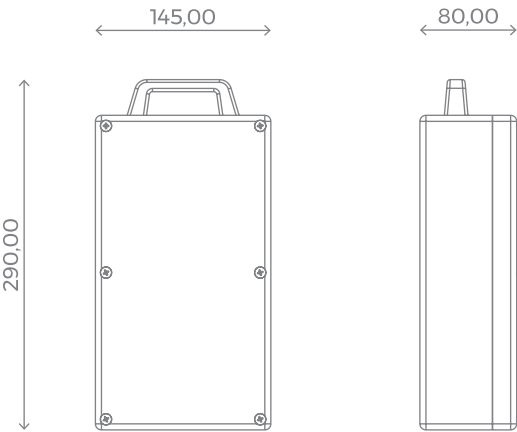
DIMENSIONS: **W** 210, **H** 330, **D** 135 MM

ARTICLE CODE 21017K000000B2K

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 32A 3P+N+E 6h IP44 black flying plug with 2 meters of 5G 6 sqmm neoprene H07RN-F electric cable.	6x POWERCON TRUE TOP female panel connectors 230V 16A 3P IP67.	1x RCCB 4P 40A Idn=30mA type AC.	6x MCB 1P+N 16A C-4.5kA.	

SERIES 230


- Самозатухающий корпус из твердого бутилкаучука с ручкой для переноса.
- Ступень захисту IP44.
 - Клас ізоляції II.



SERIES 230 230V 32A

DIMENSIONS: **W** 145, **H** 290, **D** 80 MM

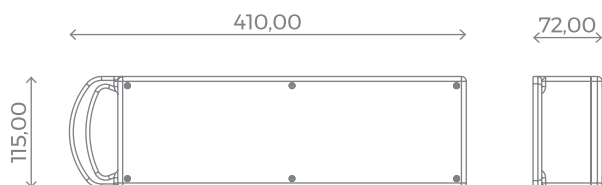
ARTICLE CODE 23017K6C2DM

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 32A 3P+N+E 6h IP44 black panel plug.	6x CEE 230V 16A 2P+E 6h IP44 black panel sockets.		2x Thermal switches 16A.	

SERIES 440

→ Самозатухающий корпус из твердого бутылкаучуку.

→ Клас ізоляції II.



SERIES 440 230V 16A

DIMENSIONS: **W** 410, **H** 115, **D** 72 MM

IP54 protection rating.

ARTICLE CODE 4403K300000C2

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 230V 16A 2P+E 6h IP67 black flying plug with 3 meters of 3G 2.5 sqmm neoprene H07RN-F electric cable.	3x CEE 230V 16A 2P+E 6h IP67 black panel sockets.	1x RCBO 1P+N 16A C-6kA I _{dn} =30mA type AC.		

SERIES 440 230V 32A

DIMENSIONS: **W** 410, **H** 115, **D** 72 MM

IP44 protection rating.

ARTICLE CODE 4406K400000B2


LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 230V 32A 2P+E 6h IP44 black flying plug with 2 meters of 3G 6 sqmm neoprene H07RN-F electric cable.	4x CEE 230V 16A 2P+E 6h IP44 black panel sockets.	1x RCCB 1P+N 40A I _{dn} =30mA type AC.	2x MCB 1P+N 16A C-4.5kA (One MCB per every two sockets).	

SERIES 440 230V 16A

DIMENSIONS: **W** 410, **H** 115, **D** 72 MM

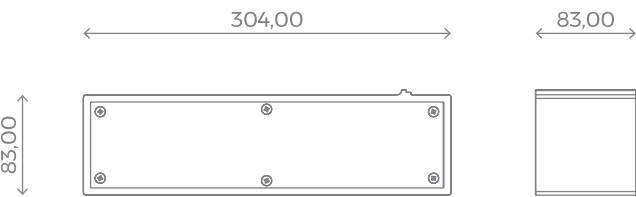
IP44 protection rating.

ARTICLE CODE 4403K600000L

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x Male panel connector 230V 16A 19P IP67 Socapex compatible.	6x CEE 230V 16A 2P+E 6h IP44 black panel sockets.			

SERIES 430

→ Самозатухающий корпус из твердого бутилкаучука.




SERIES 430 230V 16A

DIMENSIONS: **W** 304, **H** 83, **D** 83 MM

IP2X protection rating.

Class of insulation II.

ARTICLE CODE 4303KW50000BLV

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 230V 16A 2P+E 6h IP44 black panel plug.	1x CEE 230V 16A 2P+E 6h IP44 black panel socket (Power Line Continuation). 5x Universal 230V 2P+E panel sockets (Schuko and Italian bivalent).			1x Red LED indicating power network presence.


SERIES 430 230V 16A

DIMENSIONS: **W** 304, **H** 83, **D** 83 MM

IP44 protection rating.

Class of insulation II.

ARTICLE CODE 43010005W-FR/BL | 43010005W-GER | 43010005W-ENG | 43010005W-SWI

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 230V 16A 2P+E 6h IP44 black panel plug.	1x CEE 230V 16A 2P+E 6h IP44 black panel socket (Power Line Continuation). 5x Schuko sockets FR/BL - ENG - GER - SWI.			1x Red LED indicating power network presence.

SERIES 430 230V 16A


DIMENSIONS: **W** 304, **H** 83, **D** 83 MM

IP44 protection rating.

Class of insulation II.



ARTICLE CODE 430400002H

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 230V 16A 2P+E 6h IP44 black panel plug.	1x CEE 230V 16A 2P+E 6h IP44 black panel socket (Power Line Continuation). 4x CEE 230V 16A 2P+E 6h IP44 black panel sockets.			1x Red LED indicating power network presence.

SERIES 430 400V 32A

DIMENSIONS: **W** 304, **H** 83, **D** 83 MM

IP54 protection rating.

Class of insulation II.

ARTICLE CODE 43017K000300ENV

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 400V 32A 3P+N+E 6h IP67 black flying plug with 1 meter of 5G 6 sqmm neoprene H07RN-F electric cable.	3x CEE 400V 32A 3P+N+E 6h IP67 black panel sockets.			1x Red LED indicating power network presence.


SERIES 430 230V 16A

DIMENSIONS: **W** 304, **H** 83, **D** 83 MM

IP54 protection rating.

Class of insulation I.

ARTICLE CODE 430000000KLV

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x Male panel connector 230V 16A 19P IP67 Socapex compatible.	6x POWERCON TRUE TOP female panel connectors 230V 16A 3P IP67.			1x Red LED indicating power network presence.


SERIES 430 230V 16A

DIMENSIONS: **W** 304, **H** 83, **D** 83 MM

IP54 protection rating.

Class of insulation I.

ARTICLE CODE 430600002HX-PC

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x POWERCON TRUE TOP male panel connector 230V 16A 3P IP67.	1x POWERCON TRUE TOP female panel connector 230V 16A 3P IP67 (Power Line Continuation). 6x POWERCON TRUE TOP female panel connectors 230V 16A 3P IP67 (Power Line Continuation).			1x Red LED indicating power network presence.


SERIES 430 230V 16A

DIMENSIONS: **W** 304, **H** 83, **D** 83 MM

IP44 protection rating.

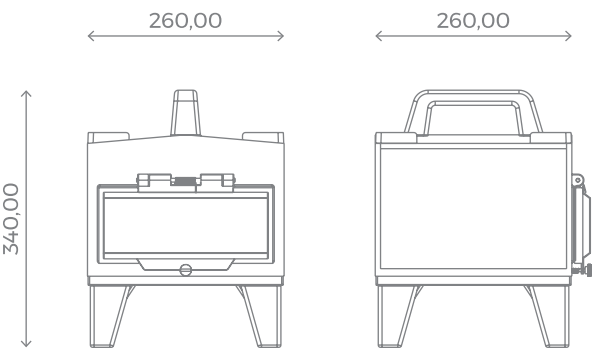
Class of insulation I.

ARTICLE CODE 4303K000000EKVW

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 230V 16A 2P+E 6h IP44 black panel plug.	1x CEE 230V 16A 2P+E 6h IP44 black panel socket (Power Line Continuation). 6x POWERCON TRUE TOP female panel connectors 230V 16A 3P IP67 (Power Line Continuation).			1x Red LED indicating power network presence.

SERIES DIMMER

- Самозатухающий корпус из твердого бутылкаучуку.
- Прозоре вікно з полікарбонату для захисту перемикачів.
 - Регулятор напруги промислового призначення для регулювання резистивних та індуктивних навантажень.
 - Ступінь захисту IP54.
 - Клас ізоляції II.



SERIES 470 DIMMER 230V 32A 5000W

DIMENSIONS: **W** 260, **H** 340, **D** 260 MM

ARTICLE CODE 4705K1DIMM

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 230V 32A 2P+E 6h IP67 black panel plug.	1x CEE 230V 16A 2P+E 6h IP67 black panel socket.	1x MCB 1P+N 20A C-4.5kA.	1x MCB 1P+N 20A C-4.5kA.	1x 5000W single phase voltage regulator.

SERIES 470 DIMMER 230V 16A 3000W

DIMENSIONS: **W** 260, **H** 340, **D** 284.5 MM

ARTICLE CODE 4703K1DIMV

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 230V 16A 2P+E 6h IP67 black panel plug.	1x CEE 230V 16A 2P+E 6h IP67 black panel socket.	1x MCB 1P+N 10A C-4.5kA.	1x MCB 1P+N 10A C-4.5kA.	1x 3000W single phase voltage regulator.

SERIES 230 DIMMER 230V 16A 1000W

DIMENSIONS: **W** 290, **H** 145, **D** 80 MM

ARTICLE CODE 230K1DIMV

LAYOUT	IN	OUT	PROTECTIONS		EQUIPMENT
			Main Switch	Outlets	
	1x CEE 230V 16A 2P+E 6h IP67 black flying plug with 2 meters of 3G 2.5 sqmm neoprene H07RN-F electric cable.	1x CEE 230V 16A 2P+E 6h IP67 black panel socket.			1x 1000W single phase voltage regulator.

MOBILE MULTIPLIERS



SERIES SC19

- Переносні системні адаптери на шість виводів.
- Кабелі з неопрену H07RN-F, переріз 3G 2,5 кв. мм, довжина кожного — 1,5 метра.
- Усе перевірено, підключено та готове до використання.



SERIES SC19 FEMALE

ARTICLE CODE SC19PFV6S

IN	OUT
6x CEE 230V 16A 2P+E 6h IP44 black flying plugs.	1x Female flying connector 230V 16A 19P IP67 Socapex compatible.

SERIES SC19 MALE

ARTICLE CODE SC19PMV6P

IN	OUT
1x Male flying connector 230V 16A 19P IP67 Socapex compatible.	6x CEE 230V 16A 2P+E 6h IP44 black flying sockets.

SERIES VP

- Мобільні мультиплікатори 16 A — 2 × 16 A
- Корпус із поліуретану.
 - Усі пристрої перевірені, підключені та готові до використання.



SERIES VP 16A 2x16A

Cable in neoprene H07RN-F section 3G 2,5 sqmm, length 25cm each.

ARTICLE CODE VP16N

IN	OUT	PROTECTION RATING
1x CEE 230V 16A 2P+E 6h IP44 black flying plug.	2x CEE 230V 16A 2P+E 6h IP44 black flying sockets.	IP44

ARTICLE CODE VP16NS

IN	OUT	PROTECTION RATING
1x CEE 230V 16A 2P+E 6h IP67 black flying plug.	2x CEE 230V 16A 2P+E IP67 black flying sockets..	IP67

ARTICLE CODE VP16NPCT

IN	OUT	PROTECTION RATING
1x POWERCON TRUE TOP male panel connector 230V 16A 3P IP67..	2x POWERCON TRUE TOP female panel connectors 230V 16A 3P IP67.	IP67

SERIES VP 16A 3x16A

Cable in neoprene H07RN-F section 3G 2,5 sqmm, length 25cm each.



ARTICLE CODE VP163N

IN	OUT	PROTECTION RATING
1x CEE 230V 16A 2P+E 6h IP44 black flying plug.	3x CEE 230V 16A 2P+E 6h IP44 black flying sockets.	IP44

ARTICLE CODE VP163NS

IN	OUT	PROTECTION RATING
1x CEE 230V 16A 2P+E 6h IP67 black flying plug.	3x CEE 230V 16A 2P+E IP67 black flying sockets..	IP67

ARTICLE CODE VP163NPCT



IN	OUT	PROTECTION RATING
1x POWERCON TRUE TOP male panel connector 230V 16A 3P IP67.	3x POWERCON TRUE TOP female panel connectors 230V 16A 3P IP67.	IP67

SERIES VP 32A 2x32A

Cable in neoprene H07RN-F section 3G 6 sqmm, length 25cm each.



ARTICLE CODE VP32N

IN	OUT	PROTECTION RATING
1x CEE 230V 32A 2P+E 6h IP44 black flying plug.	2x CEE 230V 32A 2P+E 6h IP44 black flying sockets.	IP44

ARTICLE CODE VP32NS

IN	OUT	PROTECTION RATING
1x CEE 230V 32A 2P+E 6h IP67 black flying plug.	2x CEE 230V 32A 2P+E 6h IP67 black flying sockets.	IP67

SERIES VP 32A 2x16A

ARTICLE CODE VP322N

IN	OUT	PROTECTION RATING
1x CEE 230V 32A 2P+E 6h IP67 black flying plug.	2x CEE 230V 16A 2P+E 6h IP44 black flying sockets.	IP44

ARTICLE CODE VP322NS

IN	OUT	PROTECTION RATING
1x CEE 230V 32A 2P+E 6h IP67 black flying plug.	2x CEE 230V 16A 2P+E 6h IP67 black flying sockets.	IP67

MOBILE CABLE EXTENSIONS



SERIES 80N CEE

→ Кабель у неопреновій оболонці H07RN-F.



ARTICLES	METERS	SECTION	IN	OUT
80N546NN	5	3G 2.5 sqmm	1x CEE 230V 16A 2P+E 6h IP44 black flying plug.	1x CEE 230V 16A 2P+E 6h IP44 black flying socket.
80N146NN	10			
80N246NN	20			
80N5B6NN	5	3G 6 sqmm	1x CEE 230V 32A 2P+T 6h IP44 black flying plug.	1x CEE 230V 32A 2P+T 6h IP44 black flying socket.
80N1B6NN	10			
80N2B6NN	20			
80N183SN	10	5G 6 sqmm	1x CEE 400V 32A 3P+N+T 6h IP67 black flying plug.	1x CEE 400V 32A 3P+N+T 6h IP67 black flying socket.
80N283SN	20			
80N1C3SN	10	5G 10 sqmm	1x CEE 400V 63A 3P+N+T 6h IP67 black flying plug.	1x CEE 400V 63A 3P+N+T 6h IP67 black flying socket.
80N2C3SN	20			
80N1D3SN	10	5G 16 sqmm	1x CEE 400V 63A 3P+N+T 6h IP67 black flying plug.	1x CEE 400V 63A 3P+N+T 6h IP67 black flying socket.
80N2D3SN	20			
80N1E3SN	10	5G 25 sqmm	1x CEE 400V 125A 3P+N+T 6h IP67 black flying plug.	1x CEE 400V 125A 3P+N+T 6h IP67 black flying socket.
80N2E3SN	20			
80N1F3SN	10	5G 35 sqmm	1x CEE 400V 125A 3P+N+T 6h IP67 black flying plug.	1x CEE 400V 125A 3P+N+T 6h IP67 black flying socket.
80N2F3SN	20			

SERIES PR UNIPOLAR

→ Кабель у неопреновій оболонці H07RN-F.

🔗 Додайте L1/L2/L3/N/PE до коду товару відповідно до необхідний тип роз'єму.



ARTICLES	METERS	CABLE	IN	OUT
PR05095MF__	5	95 sqmm	1x Male Power Lock flying connector 400V 400A IP67.	1x Female Power Lock flying connector 400V 400A IP67.
PR10095MF__	10			
PR15095MF__	15			
PR20095MF__	20			
PR05120MF__	5	120 sqmm		
PR10120MF__	5			
PR15120MF__	5			
PR20120MF__	5			

SERIES PR SOCAPEX

→ Кабель у неопреновій оболонці H07RN-F.

ARTICLES	METERS	CABLE	IN	OUT
PR1910MF	10	19x2.5 sqmm	1x Male flying connector 230V 16A 19P IP67 Socapex compatible.	1x Female flying connector 230V 16A 19P IP67 Socapex compatible.
PR1915MF	15			
PR1920MF	20			
PR1930MF	30			



SERIES MC 6 CHANNELS

→ Кабель у неопреновій оболонці H07RN-F.

ARTICLES	METERS	CABLE	IN	OUT
MC610N	10	19x2.5 sqmm	6x CEE 230V 16A 2P+E 6h IP44 black flying plugs.	6x CEE 230V 16A 2P+E 6h IP44 black flying sockets.
MC615N	15			
MC620N	20			
MC625N	30			



ELECTRIC CABLES & CABLE CROSSOVERS



SERIES MULTIPOLAR

→Кабель у неопреновій оболонці H07RN-F.

ARTICLES	CABLE
670030025	3G 2.5 sqmm
670050025	5G 2.5 sqmm
670030060	3G 6 sqmm
670050060	5G 6 sqmm
670050100	5G 10 sqmm

ARTICLES	CABLE
670030160	3G 16 sqmm
670050160	5G 16 sqmm
670030250	3G 25 sqmm
670050250	5G 25 sqmm
670050350	5G 35 sqmm

SERIES UNIPOLAR

→Кабель у неопреновій оболонці H07RN-F.

ARTICLES	CABLE
670010500	1 x 50 sqmm
670010700	1 x 70 sqmm

ARTICLES	CABLE
670010950	1 x 95 sqmm
670011200	1 x 120 sqmm

SERIES MULTIPOLAR SC19

→Кабель у неопреновій оболонці H07RN-F.

ARTICLES	CABLE
670120025	12 x 2.5 sqmm
670190025	19 x 2.5 sqmm

POWER LOCK CONNECTORS



SERIES POWER LOCK

→ Блокування безпеки для запобігання випадковому відключенню під навантаженням.

- Кабельний ввід PG 36 (400 A); кабельний ввід PG 40 (750 A).
- Ступінь захисту IP67.

SERIES PWLK FLYING MALE

TIPO	ARTICLES				
400A	PW400MVL1	PW400MVL2	PW400MVL3	PW400MVN	PW400MVT
750A	PW800MVL1-240	PW800MVL2-240	PW800MVL3-240	PW800MVN-240	PW800MVT-240



SERIES PWLK FLYING FEMALE

TIPO	ARTICLES				
400A	PW400FVL1	PW400FVL2	PW400FVL3	PW400FVN	PW400FVT
750A	PW800FVL1-240	PW800FVL2-240	PW800FVL3-240	PW800FVLN-240	PW800FVT-240



SERIES PWLK PANEL MALE

TIPO	ARTICLES				
400A	PW400MPL1	PW400MPL2	PW400MPL3	PW400MPN	PW400MPT
750A	PW800MPL1-240	PW800MPL2-240	PW800MPL3-240	PW800MPLN-240	PW800MPT-240



SERIES PWLK PANEL FEMALE

TIPO	ARTICLES				
400A	PW400FPL1	PW400FPL2	PW400FPL3	PW400FPN	PW400FPT
750A	PW800FPL1-240	PW800FPL2-240	PW800FPL3-240	PW800FPN-240	PW800FPT-240





«ASGM ENERGY»

вулиця Гарета Джонса, 11/2, Київ, 04119

Графік роботи:

Пн-Чт : 9:00-18:00

Пятниця : 9:00-17:00

СБ-Нд: вихідні

Обідня перерва з 13:00-14:00

Телефони:

38 (096) 110-16-02

38 (073) 061-76-47

38 (044) 391-16-31